DINSE 25 / DINSE 35

These are the industry standard Dinse 25 and Dinse 35 used to connect TIG torches to your welding machine dependent on its functionality and the torch you are using. Refer to the charts below for the proper connector to match your machines setup.

Note: These connectors are for non-gas-thru dinse style machines—if you have any questions regarding which connector to purchase please call or email us for help.







(1/2" 12.8mm)

DINSE 25 | DINSE 35

LINCOLN | MILLER | THERMAL ARC/TWECO | MT200-AC/DC

| LINCOLN | | | MILLER | | | THERMAL ARC / TWECO | | | CK WORLDWIDE | |
|-----------|----------|----|------------|-----------|----|---------------------|--------|----|--------------|----|
| | V155-S | 25 | | 150S | 25 | | 141i | 25 | | |
| INVERTEC | V200T | 35 | MAYCTAD | 200 | 35 | FADDICATOD | 181i | 35 | MT200-AC-DC | 35 |
| INVERTEG | V250-S | 35 | MAXSTAR | 300 | 35 | FABRICATOR | 211i | 35 | | 30 |
| | V350-PR0 | 35 | | 350 | 35 | | 252i | 35 | | |
| | | | | 200 | 35 | | 185 | 35 | , | |
| POWER MIG | 210MP | 35 | DYNASTY | 300 | 35 | ARCMASTER | 200 | 35 | | |
| | | | | 350 | 35 | | 300 | 35 | | |
| | · | | CVNCDOWAVE | 250DX | 35 | | 95S | 25 | | |
| | | | SYNCROWAVE | 350LX | 35 | | 161S | 35 | | |
| | | | VMT | 304 CC/CV | 35 | THERMAL ARC | 161STL | 35 | | |
| | | | XMT 3 | | 35 | Allo | 186i | 35 | | |
| | | | _ | | | | 201TS | 35 | | |


DINSE 25 | GAS COOLED

| 3/8-11NCF | 1 9.5 |
|-----------|---------|
| | TORCHES |

| TORCHES | ORDER # | | |
|---------------------------------------|-----------|--|--|
| CK24, 80, 90, 100 | SL2-25-24 | | |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL2-25 | | |
| MT100, CKC150, CK210, TL210, CKA16 | SL5-25 | | |
| CK26, TL26 | SL8-25 | | |

DINSE 35 | GAS COOLED 1/2-INCH | 12.8MM

| TORCHES | ORDER# |
|---------------------------------------|-----------|
| CK24, 80, 90, 100 | SL2-35-24 |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL2-35 |
| MT100, CKC150, CK210, TL210, CKA16 | SL5-35 |
| CK26, TL26 | SL8-35 |

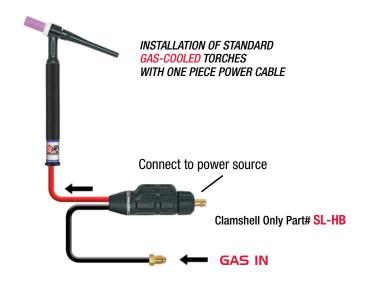


DINSE 25 | WATER COOLED 3/8-INCH | 9.5MM

| TORCHES | ORDER# |
|-----------------------------|------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | OLWINAT OF |
| CK510, CK24W, FL230, FL250 | SLWHAT-25 |
| MR140, MT400, MT500 | |

DINSE 35 | WATER COOLED 1/2-INCH | 12.8MM

| TORCHES | ORDER# |
|-----------------------------|------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | OLWINAT OF |
| CK510, CK24W, FL230, FL250 | SLWHAT-35 |
| MR140, MT400, MT500 | |

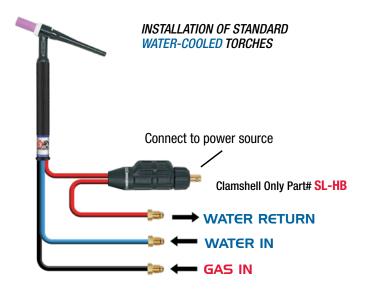

DINSE 25M / 35M

These are the industry standard gas-thru Dinse 25 and Dinse 35 used to connect TIG torches to your welding machine dependent on its functionality and the torch you are using. Refer to the charts below for the proper connector to match your machines setup.



(3/8" 9.5mm)



Note: These connectors are for gas-thru dinse style machines—if you have any questions regarding which connector to purchase please call or email us for help.

DINSE 25M | DINSE 35M | LINCOLN | MILLER

| LINCOLN | | | | MILLER | | | | | | | |
|-------------|---------|-----|-----------|---------|-----|------------|-------|-----|---------|--------|------|
| | TIG 175 | 35M | INVEDTEC | V160T | 35M | SYNCROWAVE | 180SD | 35M | MAXSTAR | 150STL | 25M |
| COLLADEWAVE | TIG 185 | 35M | | V205T | 35M | | 200 | 35M | | ISUSIL | 2011 |
| SQUAREWAVE | TIG 200 | 35M | INVERTEC | V311T | 35M | | 210 | 35M | | 150STH | 35M |
| | TIG 275 | 35M | | | | | | | | | |
| ASPECT | 300/375 | 35M | PRECISION | TIG 225 | 35M | ECONOTIG | | 35M | | | |


DINSE 25M | GAS COOLED

3/8-INCH | 9.5MM

| TORCHES | ORDER# |
|---------------------------------------|------------|
| CK24, 80, 90, 100 | SL2-25M-24 |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL2-25M |
| MT100, CKC150, CK210, TL210, CKA16 | SL5-25M |
| CK26, TL26 | SL8-25M |

DINSE 35M | GAS COOLED 1/2-INCH | 12.8MM

| TORCHES | ORDER# |
|---------------------------------------|------------|
| CK24, 80, 90, 100 | SL2-35M-24 |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL2-35M |
| MT100, CKC150, CK210, TL210, CKA16 | SL5-35M |
| CK26, TL26 | SL8-35M |

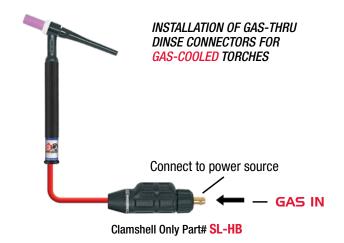


DINSE 25M | WATER COOLED 3/8-INCH | 9.5MM

| TORCHES | ORDER # |
|-----------------------------|--------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | OLIMINAT OFF |
| CK510, CK24W, FL230, FL250 | SLWHAT-25M |
| MR140, MT400, MT500 | |

DINSE 35M | WATER COOLED 1/2-INCH | 12.8MM

| TORCHES | ORDER # |
|-----------------------------|---------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | OLIMINAT OFFI |
| CK510, CK24W, FL230, FL250 | SLWHAT-35M |
| MR140, MT400, MT500 | |

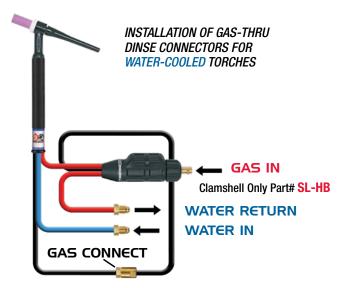



TWECO/CAM-LOCK SAFE-LOC®

These are the industry standard TWECO / CAM-LOCK SAFE-LOC adapters used to connect TIG torches to your welding machine dependent on its functionality and the torch you are using. Refer to the charts below for the proper connector to match your machines setup.


Note: These connectors are for non- gas-thru TWECO/CAM-LOCK SAFE-LOC style machines—if you have any questions regarding which connector to purchase please call or email us for help.

TWECO | GAS COOLED

| TORCHES | ORDER# |
|---------------------------------------|----------|
| CK24, 80, 90, 100 | SL2-2-24 |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL-2 |
| MT100, CKC150, CK210, TL210, CKA16 | SL-5 |
| CK26, TL26 | SL-8 |

CAM-LOCK | GAS COOLED

| TORCHES | ORDER # |
|---------------------------------------|-----------|
| CK24, 80, 90, 100 | SL2-CL-24 |
| CK9, 17, 130, 150, FL130, FL150, MR70 | SL2-CL |
| MT100, CKC150, CK210, TL210, CKA16 | SL5-CL |
| CK26, TL26 | SL8-CL |

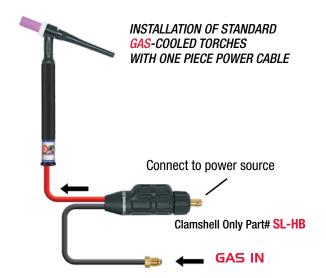

TWECO | WATER COOLED

| TORCHES | ORDER # |
|-----------------------------|------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | OLIMINAT T |
| CK510, CK24W, FL230, FL250 | SLWHAT-T |
| MR140, MT300, MT400, MT500 | |

CAM-LOCK | WATER COOLED

| TORCHES | ORDER # |
|-----------------------------|-------------|
| CK18, 20, 24W, 25, 180, 200 | |
| CKT200, CK230, CK300, TL300 | CLWILLAT OL |
| CK510, CK24W, FL230, FL250 | SLWHAT-CL |
| MR140, MT300, MT400, MT500 | |

